

we care 

primus

laundry equipment

Industrial Hydro Extractors

HE 239 259, HEM 239 259 289



FEATURES

- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Easy access to all parts
- Flexible basket suspension reduces noise and vibrations to minimum (HE 239, 259)
- Fixed basket suspension idea for use on ships and drilling platforms (HEM 239, 259, 289)
- „Swing away“ lid for easy filling
- Safety lid of the extractor can be open only when basket has come to a complete stand still

OPTIONS

- Coin op timer



ROBUST DESIGN




STANDARD STAINLESS
STEEL DRUM



SERVICE FRIENDLY

TYPE		HE 239	HEM 239	HE 259	HEM 259	HEM 289
CAPACITY	kg	8-10	8-10	12-15	12-15	18-20
Capacity drum	l	38	38	58	58	88
BASKET ROTATION						
50 Hz	rpm	1450	1450	1450	1450	1450
60 Hz	rpm	1740	1740	1740	1740	1740
G-FACTOR		440	440	575	575	705
OPERATION						
Manual		+	+	+	+	+
Coins or tokens		+	+	+	+	-
Central control		+	+	+	+	-
SHIPPING DATA						
Net weight	kg	74	85	109	140	190
Gross weight						
Crimpfoiled case	kg	90	101	131	162	219
Wooden case	kg	140	151	192	223	396
Volume						
Crimpfoiled case	m ³	0,57	0,57	0,8	0,8	1,18
Wooden case	m ³	0,65	0,65	0,9	0,9	1,3
+ = Available						
- = Not available						

TYPE	HE 239	HEM 239	HE 259	HEM 259	HEM 289
A (mm)	850	910	870	980	1050
B (mm)	780	840	800	910	990
C (mm)	665	665	790	790	920
D (mm)	>100	>100	>100	>100	>100
E (mm)	515	515	640	640	770
F (mm)	250	250	300	300	370
G (mm)	402	402	465	465	525
H (mm)	660	660	785	785	910
I (mm)	>250	>250	>250	>250	>250
J (mm)	340	400	360	480	550
K (mm)	320	390	330	420	470

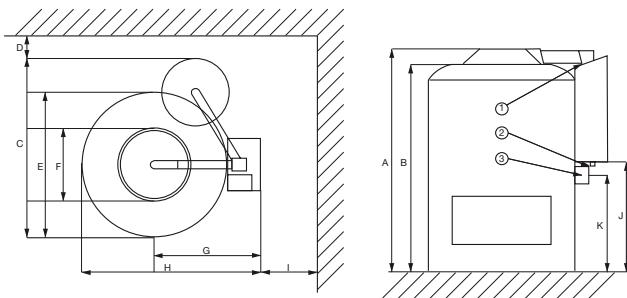

1. Operation keys
2. Electrical connection
3. Drain

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

